
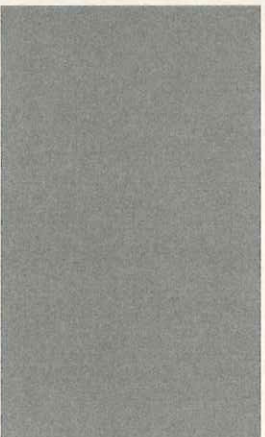


# MAXIMIZER

## COUNTERTOP CONCRETE

### Custom Colors

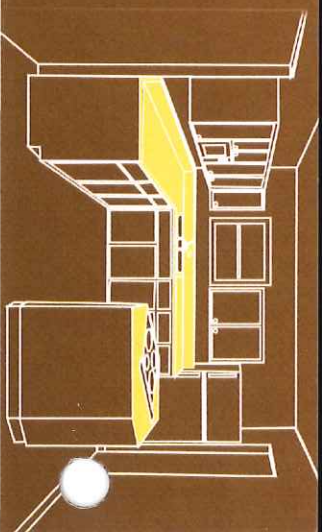


**Dolphin**




**Ebony**



**Mesa**

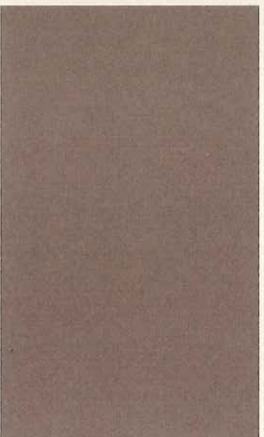

**Oxford Brown**

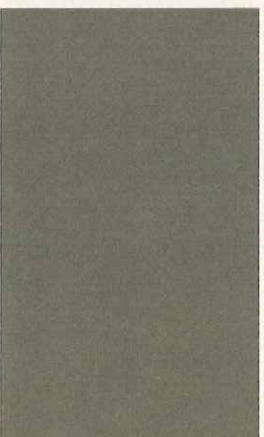

**Slate**



**Sun Buff**

### UNIVERSAL COLOR CHART

Color shown may vary upon installation. Concrete color is altered by many factors including cement color, slump, finishing practices and curing method. Using the contemplated materials and construction techniques, representative samples should be cast for approval, especially when exact concrete color matching is important and when special finishes are specified.

### TECHNICAL DATA

Compressive Strength	ASTM C 39	Exceeds ASTM C387 28 days 5,500 psi
Plastic Density	ASTM C 138	100 lbs ft <sup>3</sup> +/- .4 lbs
28-Day Air Dry Density	ASTM C 567, ASTM C 330	96 lbs ft <sup>3</sup> +/- .4 lbs
Freeze-Thaw Resistance	ASTM C 666	Relative Dynamic Modulus (300 Cycles) : 100.7 (Excellent)

### TYPICAL VALUES

Area in Sq. Feet	3	6	9	12	18	36
	1	2	3	4	6	12
Slab 4" Thick	1	2	3	4	6	12

To determine coverage multiply length X width X thickness (all in feet) = the number of bags needed. Note: Convert all measurements in inches to feet. (i.e. 4 inches thick = .33 feet thick.) Remember to allow for waste and spillage. 1 Bag = 1 Cubic Foot

A product of



For more Information  
Call 972.647.6764

www.MAXIMIZERconcrete.com